


Performance Curve

SG : 1.9
REF No. A3400309
Frequency : 50Hz

MODEL: NH-657PW-C(H)

IMPELLER DIA : 114 mm

	PUMP						MOTOR
	Discharge Capacity	Discharge Gauge Head	Suction Gauge Head	Equivalent Velocity Head	Total Head	Pump Efficiency	Power Requirement
	L/MIN	M	M	M	M	%	Kw
1	0	17.4	0	0	17.4	0	2.10
2	330	15.5	0	0	15.5	32.1	2.60
3	530	12.6	0	0	12.6	37.5	2.90
4	750	8.9	0	0	8.9	36.3	3.00
5	900	5.8	0	0	5.8	27.4	3.10

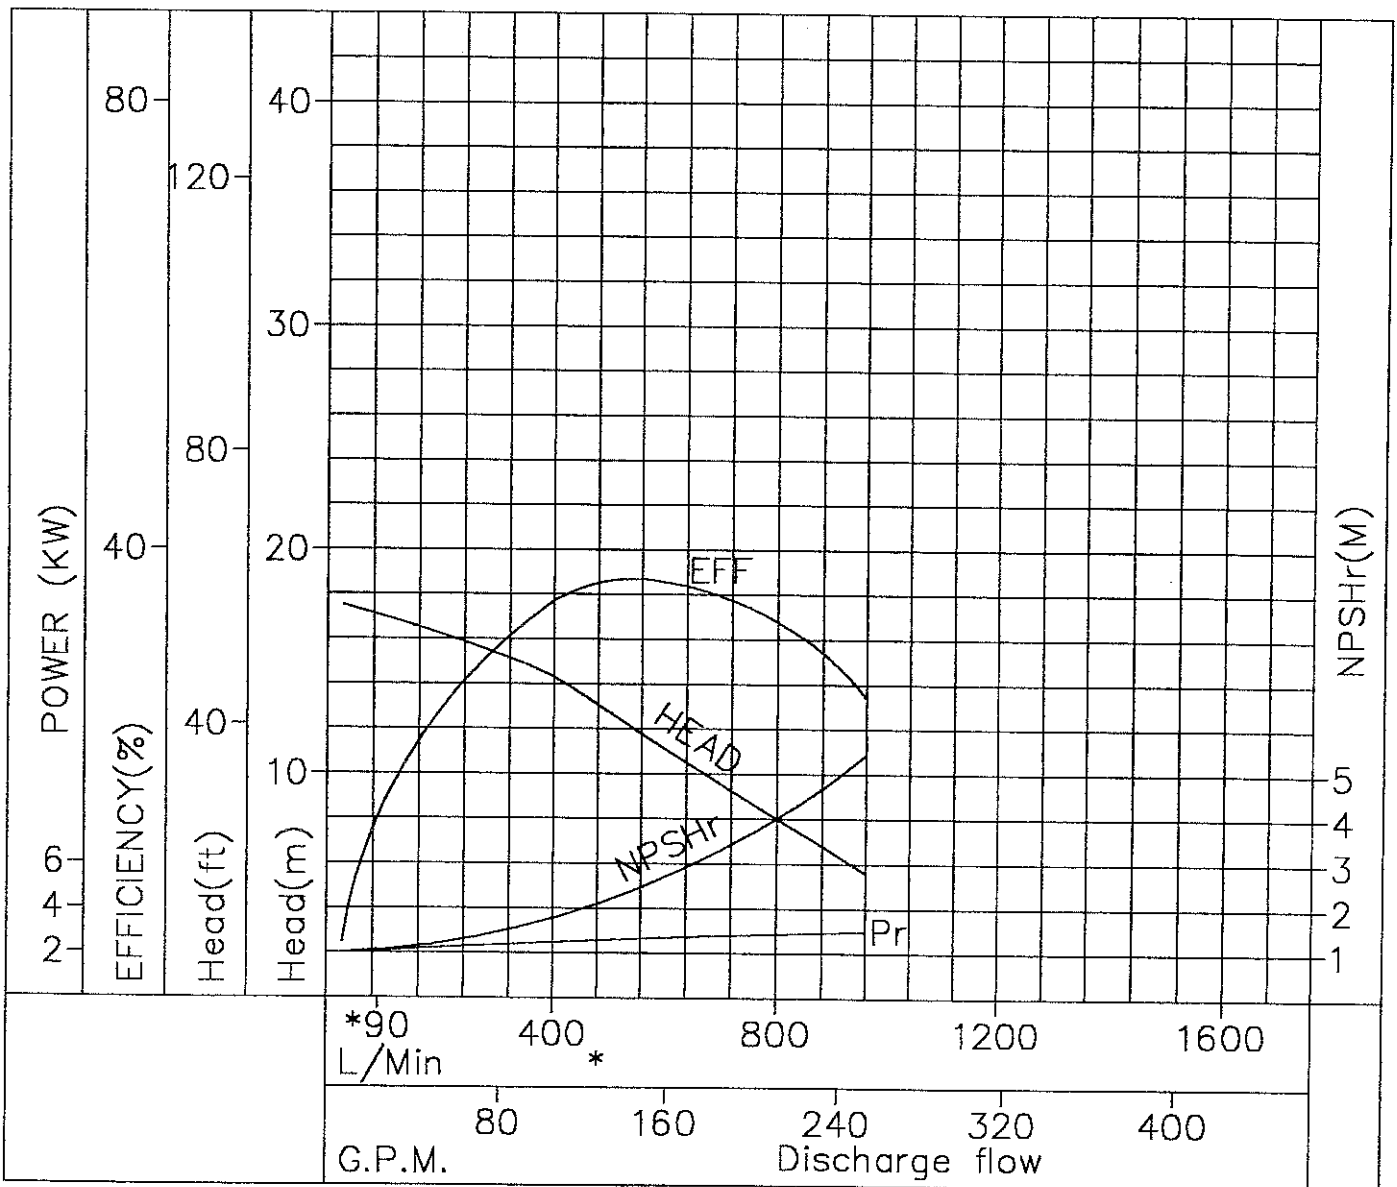

- NOTE:
- | | |
|--------------------------|---------------------|
| 1. Best efficiency point | 12.5 m at 550 l/min |
| 2. Rated speed | 2860 R.P.M. |
| 3. Temperature range | 0 - 90°C |
| 4. Motor power | 5.5 Kw |