



SEALLESS

# DRUM PUMPS PP

FOR AGGRESSIVE LIQUIDS  
THE RIGHT DRUM PUMPS



- This saves maintenance costs
- This avoids malfunctions
- This saves time
- This saves money

# The most popular model for the most applications in drums and containers and technical objects...



**PP drum pumps...**



**...for acids and bases.**



**are the basis ...**



## Advantages for the reliability

### This saves maintenance costs

- robust coupling
- strong shaft
- stainless steel for stressed parts
- new development without seal



## Advantages for the operational safety

### This avoids malfunctions

- optional magnetic clutch for hermetical sealed pump
- strong connection motor-pump



## Advantages for the user

### This saves time


- quick release coupling
- no problems with failed threads



## Advantages for the customer

### This saves money


- one supplier for the most applications
- one motor for all types of impeller
- less equipment required

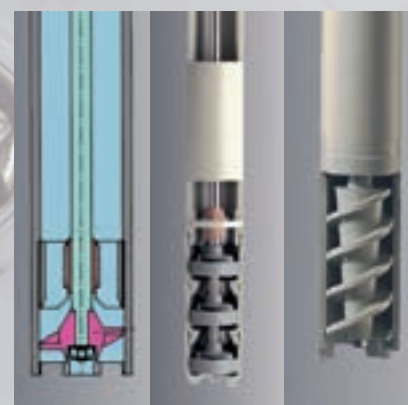



# DRUM PUMPS PP

**FOR AGGRESSIVE LIQUIDS  
THE RIGHT DRUM PUMPS**

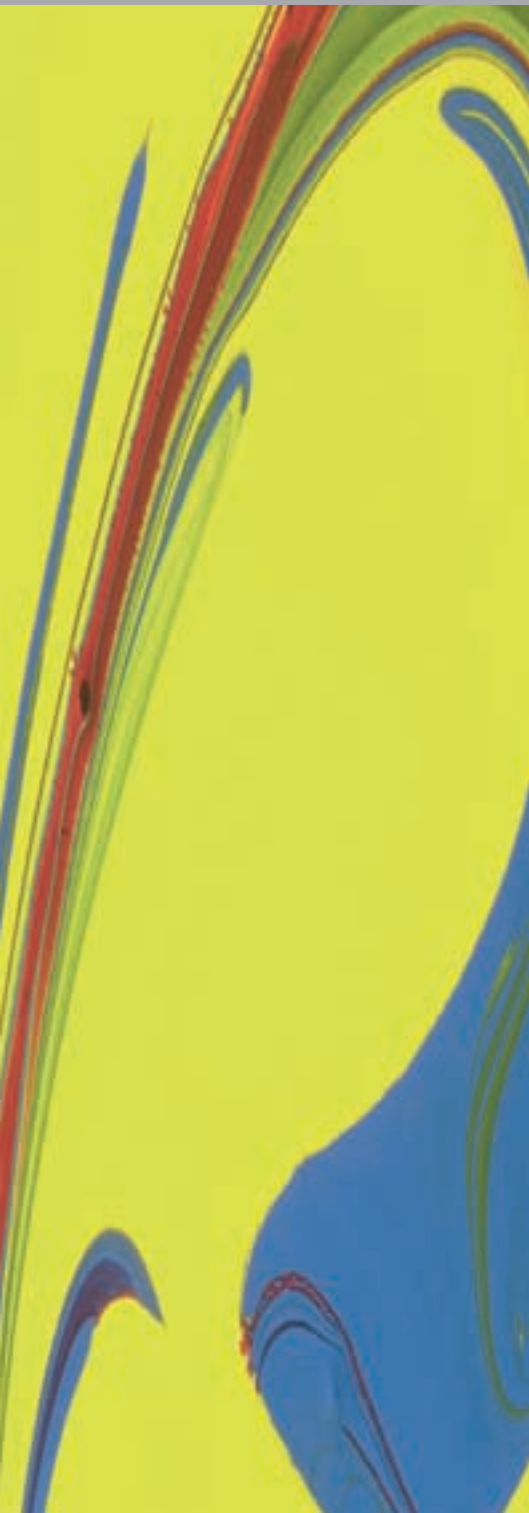

## SEALLESS

- acids, low concentrated
- bases, low concentrated
- colours
- emulsions
- dispersions
- suspensions
- fluids of medium viscosity
- cosmetics



### For aggressive\* liquids...

Versions A, R column 1-2, page 7

### If the liquid has to be mixed...

Series MP

Versions A, R column 4, page 7

### For liquids of medium viscosity...

Version S column 3, page 7

#### SL-PP:

For transfilling and draining of drums and containers.

The perfect drum pump for the most thin liquids. Version A for high flow rate, Version R for high pressure, with foot valve for complete drainage.

#### SL-MP-PP:

For stirring of emulsions, dispersions, suspensions, etc. before starting the transfilling action.

The mixing drum pump is fitted with mixing apertures. By moving a sliding sleeve with a lever, these holes can be opened or closed.

„Open“ is for mixing inside the drum and „closed“ is for pumping out of the drum. All this can be achieved with one unit.

#### SL-PP-S:

The feed screw (S) is dedicated for liquids of medium viscosity ( $\eta > 200$  mPas), if the impeller types A and R reach their limitations.

With induction motor ideal combination for gentle dealing with the liquid.

#### Recommendation:

SL-PP-R-HC with motor p400-A.

#### Recommendation:

For a good stirring effort use the powerful motor p400-A.

#### Recommendation:

Induction motor with frequency inverter for variable flow rate.

\*with drive shaft hastelloy C (HC) there are no problems with aggressive liquids



## Sealless pumping units

Sealless pump tubes from grün are reliable without using a mechanical seal and are suitable for almost any aggressive, low viscosity media. Our sealless pumping units are available in PP, PVDF, stainless steel (SS) and aluminium (Alu) material versions.

(Separate brochure for each material available).



- **optimised in price**
- **short and occasional usage**
- **it likes light and thin liquids**
- **opt. LVR: low voltage release for advanced safety**
- **opt. SR: speed reducer for simple flow rate variation**

Motor		Pump tube
p310		Performance curve
Power (W)	520	Hydr. Values
Voltage (V)	230 / 120	Capacity Q (l/min)
Protection	IP 24	Delivery head H (mWS)
LVR*	optional	Density $\rho$ (kg/l)
		Viscosity $\eta$ (mPas)
Weight (kg)	3,5	Weight (kg)
		Temperature (°C)
Order-No.	500-00XX	
Voltage (V)	230 120	L (mm)
p310 (LVR)	16 28	700
p310-A	17 29	1000
p310-A-SR	54 -	1200

### Design PP:

The pump tube (3) is divided by the inner tube into sections to separate the fluid under pressure (3 flow channels) and the low pressure section (wave channel).

### Advantages of sealless drum pumps

- Cleaning the pumping unit is greatly facilitated; the risk of fluid carry-over when moving the pump to a different container is minimized.
- The build-in webs add considerable rigidity to the pump tube, resulting in greatly improved mechanical stability of the pumping unit.
- No bearings in the wave channel.
- Motor power is transferred by proven, robust coupling (1) with curved teeth over the stainless steel coupling element (2) with a large double bearing.
- Of course, the sealless pump tubes are fully compatible with the sealed models, allowing you to use the pumping units with any motor from grün product range.
- Depending on the application you can select one of 3 different types of impellers: axial (A), radial (R) and feed screw (S).



- **the ideal drive**
- **big resources in power and durability**
- **quick working and saving time**
- **opt. LVR: low voltage release for advanced safety**
- **opt. SR: speed reducer for simple flow rate variation**
- **opt. IP 54: 230V**
- **Order-No. 500-0052**

Motor		Pump tube
p400		Performance curve
Power (W)	850	Hydr. Values
Voltage (V)	230 / 120	Capacity Q (l/min)
Protection	IP 24	Delivery head H (mWS)
LVR*	optional	Density $\rho$ (kg/l)
		Viscosity $\eta$ (mPas)
Weight (kg)	4	Weight (kg)
		Temperature (°C)
Order-No.	500-00XX	
Voltage (V)	230 120	L (mm)
p400 (LVR)	23 25	700
p400-A	24 26	1000
p400-A-SR	56 -	1200

Motor		Pump tube
d600		Performance curve
Power (W)	600	Hydr. Values
Pressure (bar)	3-7	Capacity Q (l/min)
		Delivery head H (mWS)
		Density $\rho$ (kg/l)
		Viscosity $\eta$ (mPas)
Consumption of air (l/s)	10	Weight (kg)
Weight (kg)	1,7	Temperature (°C)
	Order-No.	L (mm)
d600	520-0016	700
		1000
		1200



- **the power drive**
- **variable speed**
- **starting knob fixable**
- **for heavy duty**
- **easy handling**
- **economical air consumption**

### Product profile

A drum pump always consists of a pump tube and a motor. These components are connected by means of a quick coupling. Any pump tube can be used with any motor.

#### Selecting the right order-no.

In the general order-no., for example 500-00XX, fill in the specific numbers for your choice. Example: Order-No. p310-A 230V: 500-0017 SL-PPA-SS-1000 (SS drive shaft): 670-0002 SL-PPA-HC-1200 (HC drive shaft): 670-0006



- **the silent marathon worker**
- **ideal for viscous liquids**
- **smooth product treatment with feed screw**
- **voltage 230 V (1-ph) and 400 V (3-ph)**
- **opt.: with frequency inverter**
- **opt.: Ex-proof versions**

Motor		Pump tube
pd500		Performance curve
Power (W)	see below	Hydr. Values
Voltage (V)	230 / 400	Capacity Q (l/min)
Protection	IP 54	Delivery head H (mWS)
Overload release	1-ph: yes 3-ph opt.	Density $\rho$ (kg/l)
Weight (kg)	5	Viscosity $\eta$ (mPas)
		Weight (kg)
		Temperature (°C)
	Order-No.	L (mm)
pd500-1 370W	500-0042	700
pd500-3 370W	500-0039	1000
		1200

\* LVR: Low voltage release (restart protection)





1	2	3	4	5
SL-PP-A	SL-PP-R	SL-PP-S	SL-MP PP-A	SL-MP PP-R
A100	R100		A100	R100
max	max		max	max
100	90		100	90
6	14		6	14
1,3	1,6		1,3	1,6
300	250		300	250
1,5	1,5		1,5	1,5
50	50		50	50
670-000X	675-000X		670-00XX	675-00XX
SS HC	SS HC		SS HC	SS HC
1 4	1 4		19 22	37 40
2 5	2 5		20 23	38 41
3 6	3 6		21 24	39 42

1	2	3	4	5
SL-PP-A	SL-PP-R	SL-PP-S	SL-MP PP-A	SL-MP PP-R
A200	R200	S200	A200	R200
max	max	max	max	max
110	100	60	110	100
8	20	10	8	20
1,6	2	1,5	1,6	2
800	700	700	800	700
1,5	1,5	1,5	1,5	1,5
50	50	50	50	50
670-000X	675-000X	670-00XX	670-00XX	675-00XX
SS HC	SS HC	SS HC	SS HC	SS HC
1 4	1 4	09 13	19 22	37 40
2 5	2 5	19 14	20 23	38 41
3 6	3 6	11 15	21 24	39 42

1	2	3	4	5
SL-PP-A	SL-PP-R	SL-PP-S	SL-MP PP-A	SL-MP PP-R
A600	R600	S600	A600	R600
max	max	max	max	max
90	80	60	90	80
6	11	6	6	11
1,6	2	1,5	1,6	2
800	700	700	800	700
1,5	1,5	1,5	1,5	1,5
50	50	50	50	50
670-000X	675-000X	670-00XX	670-00XX	675-00XX
SS HC	SS HC	SS HC	SS HC	SS HC
1 4	1 4	09 13	19 22	37 40
2 5	2 5	19 14	20 23	38 41
3 6	3 6	11 15	21 24	39 42


1	2	3	4	5
SL-PP-A	SL-PP-R	SL-PP-S	SL-MP PP-A	SL-MP PP-R
		S500		
		max		
		60		
		6		
		1,5		
		1500 (min 100)		
		1,5		
		50		
		670-00XX		
		SS HC		
		09 13		
		19 14		
		11 15		

Other voltages on demand.

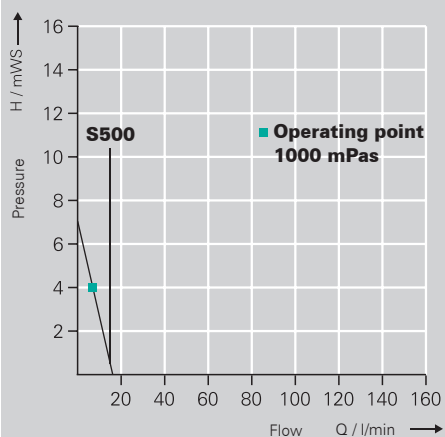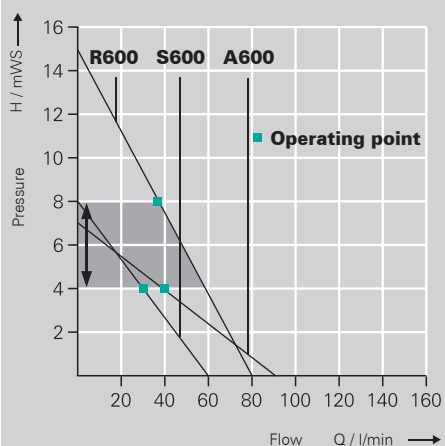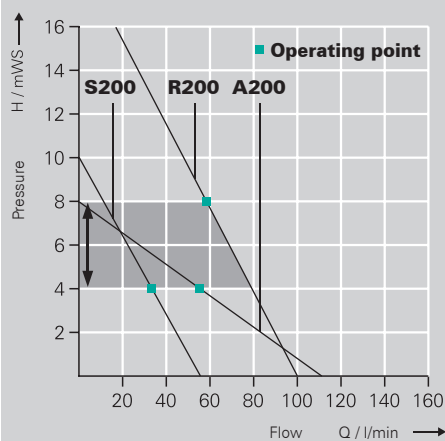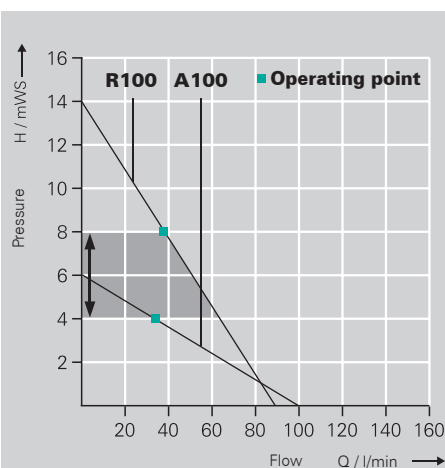


## Table of materials

Description	Pump tube version PP
1. Curved teeth coupling	PA
2. Coupling element	PP/SS
3. Pump tube with flow and wave channel	PP
4. Drive shaft opt.	SS or HC
5. Wave channel	PP
6. Slide bearing	PTFE
7. Impeller	PP

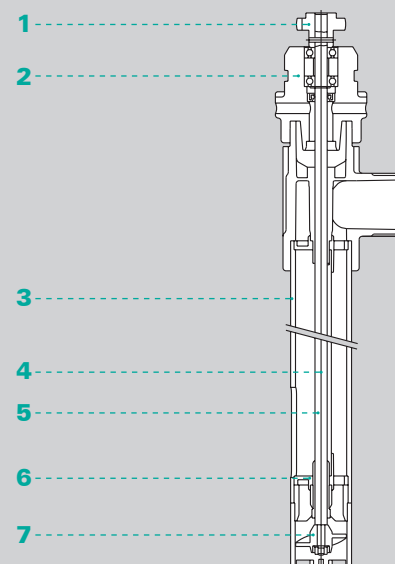

Cross-section of pump:


When fluid enters the wave channel, a surge hole allows it to escape into the fluid area surrounding the pumping unit. In the wave channel is no overpressure and the fluid level in both (wave channel and drum) is always the same. For this reason the pump doesn't need a seal between drive shaft and housing.

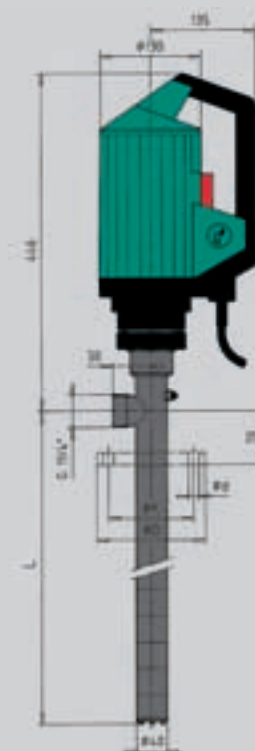

**Mechanical sealed (MS) pumps  
in separate catalogue.**



# ACCESSORIES

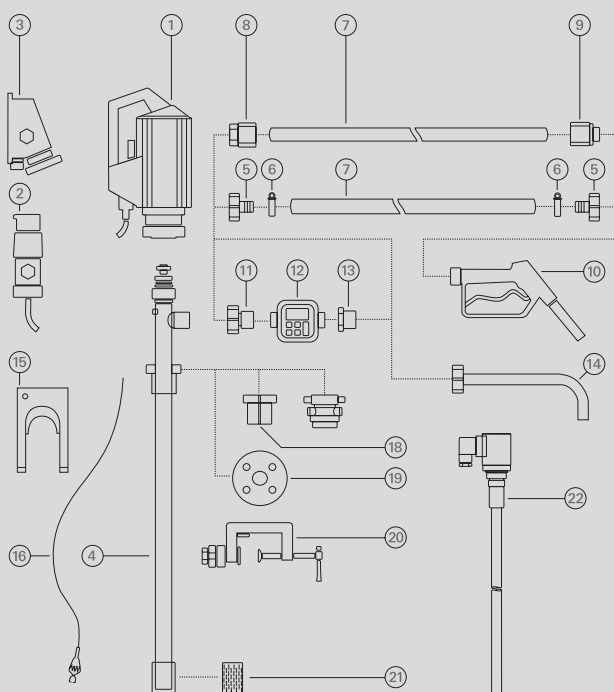

- 1 Drive motor
- 2 Explosion-proof plug
- 3 Explosion-proof socket
- 4 Pump tube
- 5 Hose connector
- 6 Hose clamps
- 7 Hose
- 8 Hose fittings
- 9 Hose fittings
- 10 Nozzle
- 11 Flow meter connection
- 12 Flow meter
- 13 Reducing piece
- 14 Discharge spout
- 15 Wall bracket
- 16 Equipotential bounding cable
- 17 Emission proof drum adapter
- 18 Drum adapter
- 19 Installation flange
- 20 Clamping device
- 21 Foot strainer
- 22 Level switch

**Distributor:**

**grün-pumpen gmbh**  
**Otto-Schott Str. 19**  
**D-97877 Wertheim**  
**Telefon +49 93 42 9 35 16-0**  
**Telefax +49 93 42 9 35 16-29**  
**info@gruen-pumpen.de**  
**www.gruen-pumpen.de**

**Handelsregister:**  
**Reg. Gericht Mannheim**  
**HRB 570326**  
**Sitz der Gesellschaft:**  
**Wertheim**  
**Geschäftsführer:**  
**Ralph Dostmann,**  
**Dr. Thomas Sigel**  
**USt.IdNr. DE 160765854**

**g** <sup>®</sup>  
**grün-pumpen**  
 take out, what's in.